



Current Product Listing

Engine Oils

- ◆ Aegis No 1 Synthetic Motor Oil
- ◆ 5w/30, 10w/30, 10w/40 Motor Oils
- ◆ 15w/40 and 20w/50 Multifleet Motor Oils
- ◆ 30/40 and 20/40 Heavy Duty Motor Oils
- ◆ 15/40, 15/50 and 20/50 Motor Oils
- ◆ CNG/LPG Motor Oil
- ◆ Running In motor Oil
- ◆ Racing GP50 Motor Oil
- ◆ SAE 10, 20, 30, 40, 50 & 90 Oils
- ◆ Plus 100 Motor Oil
- ◆ Super 2 Stroke Motor Oil
- ◆ Super Outboard Motor Oil
- ◆ STOU Super Tractor Oils

Diesel Oils

- ◆ 15w/40 Super Diesel Oil
- ◆ Series 2/30 and 2/40 Motor

Oils

- ◆ Series 3/10, 3/20, 3/30, 3/40 and 3/50 Motor Oils.

Gear and Transmission oils

- ◆ EP 80w/90 and EP 85w/140 Gear Oils
- ◆ EP 90 and EP 140 Limited Slip Differential Oils
- ◆ Gear Oil Light
- ◆ Tractrans 10 and 30
- ◆ Roadranger 50 Oil
- ◆ ATF Universal D-III
- ◆ ATF BTR 95

Hydraulic Oils

- ◆ Hydraulic oil ISO 32, 46, 68, 100 and 150

- ◆ Other Oils
- ◆ Power Steering Fluid
- ◆ Chain Bar Lubricants
- ◆ Slideway Oils

- ◆ Shearing Plant Oil
- ◆ Air Tool Oils
- ◆ Compressor Oils
- ◆ Mould Release Oils
- ◆ Rotary Vacuum Pump Oils

Other Products


- ◆ Brake and Clutch Fluid DOT 4
- ◆ Antifreeze/Coolant
- ◆ Motor Honey Oil Additive
- ◆ Handcleaner Xtra
- ◆ Kerosine

Greases

- ◆ Multipurpose Grease
- ◆ Multiplex Grease
- ◆ Moly Lithium Grease

Washes and Degreasers

- ◆ Transwash
- ◆ Super Solv
- ◆ Citrus Cleaner

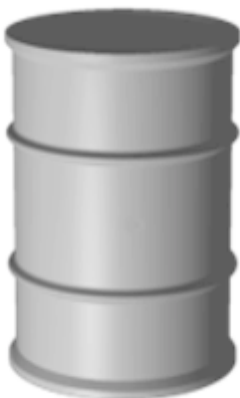

Our oils are available in 209 and 60 litre drums, 20, 5 and 1 litre packs.

New Zealand Oils for New Zealand Conditions



Ægis Oil Company Product Information Freephone 0800 655-OIL (655-645)

Motor Oils

Aegis No 1 Motor Oil 15W/50 SG/CD

This is a superior Synthetic Fortified Motor Oil, providing excellent performance and protection for all types of passenger car engines under severe driving conditions. Aegis No 1 has superior high temperature protection, keeps engines clean and reduces engine wear, allows easier engine starts at low temperature. Aegis No 1 exceeds engine builders recommendations for API services SG/CD

Motor Oil 5w/30, 10w/30 and 10w/40 SJ

These oils are latest technology SJ multigrade oils designed to meet the API's SJ requirements for car and light truck motor oils. These oils are blended using the latest in additive technology and carefully selected thermally stable paraffinic base stocks, which together give unparalleled protection to your engine. These oils provide the highest levels of lubrication and protection over the widest range of operating temperatures and conditions.

Motor Oil Multifleet 20w/50 & 15w/40 SG/CC

A multigrade crankcase oil blended to API Engine Oil Classification SG/CC making it suitable for most petrol and small to medium diesel engines, particularly suitable for late model small to medium naturally aspirated and turbo-charged engines. An ideal top up oil for premium engine protection for the mixed fleet operator.

Motor Oil 15w/40 and 15w/50 SG/CC

A multigrade oil blended from highly refined base oils and selected additives. Specifically formulated for late model, either naturally aspirated, turbo charged and or fuel injected Japanese engines running under New Zealand driving conditions.

Motor Oil 20W/40 SF/CC

A multigrade crankcase oil blended to API Engine Oil Classification SF/CC making it entirely suitable for use in moderate to heavy petrol engines and small to medium diesel engines.

30/40 Motor Oil SD/CC

A multigrade crankcase oil blended to API Engine Oil Classification SD/CC making it entirely suitable for use in moderate to heavy earlier model petrol engines and small to medium diesel engines.

SAE 10,20,30,40,50 and 90 Motor Oils

Pure mineral high viscosity index oils for use in older petrol engines operating under mild service conditions. Also suitable for use in certain industrial applications where a non-additive oil is required.

CNG/LPG Motor Oil SF/CC

This is an oil specially blended for use in engines where CNG or LPG has been installed. Additional high and low temperature protection properties make this oil suitable for use in moderate to heavy petrol and small to medium normally aspirated and lightly turbo-charged diesel engines, making it ideal for the mixed fleet operator.

Plus 100 Motor Oil

This specially blended oil is for use in high mileage petrol and diesel engines. The special formula used to produce this oil is formulated to reduce oil consumption and to reduce smoking and quieten noisy engines.

Racing GP50 Motor Oil

This specially blended oil is for use in racing engines where a 50 grade mineral oil is required. This oil works to reduce sludge and works to improve lubrication in engines operating under high temperatures and conditions found in racing.

Running In Motor Oil

This oil is a pure high mineral high viscosity index oil specially blended for use in newly built engines run under a light load. Note that this oil is NOT suitable for continued use in newer engines.

Series 2/30 and Series 2/40 CC/SF

Multi-service high viscosity oils specially blended for use in both petrol and diesel engines making it ideal for the mixed fleet operator. These grades meet Detroit Diesel Specifications and comply with API CC/SF making them entirely suitable for use in later model engines. These oils provide good anti rust and anti corrosion properties.

15w/40 Super Diesel CE/SG

This oil is specifically formulated low-ash late spec high performance diesel oil for late model, high performance diesel engines including turbo-charged and super-charged engines. The oil meets MIL-L-2104E and MIL-L-46152E and Mack EO-K specifications.

Series 3/10, 3/20, 3/30, 3/40 and 3/50 CE/SF

These oils are high detergent, low ash crankcase lubricants for use in high performance turbo-charged diesel engines. They are blended to API CE/SF and are therefore entirely suitable for use in Caterpillar and other heavy equipment. These oils meet MIL-L-2104c and MIL-L-46152 and Mack EO-J specifications.

Super Tractor Oil Universal (STOU) 20w/30 CF-4, 15w/40 CG-4 and Xtra 15w/30 CG-4

Ægis Super Tractor Oil Universal oil is a range of high quality multifunctional oils suitable for use in most four stroke engines including agricultural tractors, machinery and farm vehicles, off highway vehicles, transmissions, hydraulic systems, final drives, power take offs and wet brakes. These oils meet the high temperature operating requirements of the MIL-L-21046, MIL-L-46152 and Caterpillar Series 3, GL-4 and Partial GL-5 and Allison C3 Specifications.

Super Two Stroke Oil

An oil specially formulated for use in two stroke engines. Ideal for use in Motorcycle engines, small engines, chainsaws, lawn mowers etc operating up to a 100:1 petrol oil mixture and most two stroke engine vehicles. This grade incorporates additives designed to reduce port blocking tendencies and spark plug fouling. A low ash level prevents

Ægis Oil Company Product Information Freephone 0800 655-OIL (655-645)

piston scuffing. It has been coloured red to allow easy recognition. Meets TCIII Specifications.

Super Outboard Motor Oil

Solvent diluted, ashless oil intended for all two cycle outboard engines, and suitable for oil ratios up to and including 100 to 1. Ashless technology ensures freedom from pre-ignition inducing ash deposits, otherwise a problem in high performance outboard engines. Meets TCW / III Specifications

Gear and Transmission Oils

Automatic Transmission Fluid - Universal D-III

A specially formulated universal automatic transmission fluid approved for GM Dexron III and meets Ford M2C 138 CJ, M2C 166H, M2C 33F, M2C 33G, Allison C3, Caterpillar TO2 and Daimler Benz TOB 10599. Suitable for service fill and top up of most passenger and light truck automatic transmissions.

Automatic Transmission Fluid - BTR 95

Ægis Automatic Transmission Fluid BTR 95 is formulated as a new generation Automatic Transmission Fluid and is designed to offer maximum protection to meet the controlled friction requirements of BTR (Borg Warner) LE Automatic Transmissions usually found in Ford vehicles. This oil may also be used in some manual gearboxes requiring a 75W/90 GL-4 oil.

Gear Oils EP 80W90, EP 85W140 and EP 250

These oils are Extreme Pressure gear oils for use in hypoid differentials, manual transmissions and other types of gearboxes where an EP lubricant is required. Suitable for top-up or drain and fill of most limited slip differentials. These oils meet Mack GO-G, API GL-5 and MIL-L-2105-C specifications.

Gear Oils EP 90 LS

and EP 140 LS

Ægis EP140 LS and EP 90 LS oils are extreme pressure gear oils especially developed for use in limited slip differentials. The high load carrying capacity of these oils helps to prevent damage to gears that are operating under extreme conditions as found in limited slip differentials, and with the use of friction modifiers, correct operation of limited slip differential clutches is assured. These oils meet Mack GO-G, API GL-5 and MIL-L-2105-C specifications.

Gear Oil Light

This oil is an Extreme Pressure gear oil for use in hypoid differentials, manual transmissions and other types of gearboxes where an EP lubricant is required. It is a specifically blended gear oil especially for use in front wheel drive car transmissions where an EP 90 oil results in stiff changing of gears. Meets API GL-5 specifications.

Roadranger 50 CE/SF

This oil is specially blended for use in Roadranger type gearboxes where a SAE 50 grade oil is recommended.

Tractrans 10 and 30

These oils are a range of specialised mono-grade combined transmission and hydraulic fluids for use in many shared hydraulic / transmission applications as well as many transmission applications. These oils meet Cat TO-3 and TO-4 as well as Allison C3 and C4 specifications

Hydraulic Oils

Hydraulic Oil ISO 32,46, 68, 100 and 150

High performance additive hydraulic oils, containing oxidation and rust inhibitors together with anti-foaming and anti-wear additives. These oils are specially suited for use in high and low pressure hydraulic systems operating in arduous conditions such as fork lifts, front end loaders, diggers and earth moving power control systems, including those with

axial piston pumps for which bronze corrosion protection is often of concern.

Other Oils

Air Tool & Air Tool Light Oil

Very high performance additive oils, specifically blended to meet the requirements of high speed spindles and bearings, making them entirely suitable for use in all air tools and air based equipment.

Power Steering Fluid

Ægis Power Steering Fluid is a specially formulated oil that provides premium protection in the power steering systems found in most vehicles. It helps to reduce pump wear, and works to contain seal swelling. Meets GM Saginaw and Ford M2C128D Specifications

Rotary Vacuum Pump Oil (RVP) & Recirculating RVP

These oils are multi-purpose vacuum pump oils specially blended to provide increased reliability in a very wide range of pumps. Formulated to provide corrosion and rust protection and to provide emulsification of water. Recirculating RVP is specifically designed for non total loss systems.

Chain Bar, Doubletack Chain Bar & SAE 40 Chin Bar Lubricant

These oils are formulated especially for lubrication of chains, bars and sprockets on most types of chain saws and other equipment operating in arduous conditions. Improved stick ability lubrication of both top and bottom of the bar is assured without forming a varnish on the chain. These oils are not suitable as a two stroke mix or as engine oil. These oils contain antiwear, anti friction, tackiness and pitch dissolving additives. SAE 40 Chain Bar Lube is a higher viscosity oil for severe duty applications.

Compressor Oil

This is a Rust and oxidation inhibited oil intended for lubrication of

Ægis Oil Company Product Information Freephone 0800 655-OIL (655-645)

reciprocating air compressors. It is formulated to have low carbon forming tendencies as required by most equipment manufacturers. meets DIN 51506 - VDL requirements.

Mould Release Oil

Concrete mould release oil, intended for spray or brush applications to both wood or metal frames. Allows clean and easy release after the concrete has cured.

Slideway Oil

Ægis Slideway Oils are specially blended for use to lubricate machine tool slides and tables, and are also suitable for use on other machine tool parts such as gearboxes and bearings using circulation oiling systems.

Shearing Plant Oil

This is a light type oil developed especially to be suitable for use in Shearing Plant and other small equipment. The oil has excellent antiwear and antifoam properties, offering extended protection under the most extreme operating conditions. Ægis Shearing Plant Oil is formulated specifically to reduce corrosion and offers increased oxidation properties.

Ægis Motor Honey Oil Additive

Increases oil viscosity at engine operating temperatures. Improves engine compression and power. Helps worn engines run smoother and quieter. Reduces oil consumption and smoky exhausts. Use as a pre-assembly lubricant. Available in handy 400ml bottle.

Other Products

Ægis Super Universal DOT 4 Brake and Clutch Fluid

Ægis Brake and Clutch Fluid is suitable for all disc and drum braking systems as well as hydraulic clutches. It meets requirements of AS 1960-1983 (3), FMVSS No. 166 Dot 4, SAE J1703 June 1991 and ISO4925 standards. Ægis Brake and Clutch Fluid will sustain high vapour

lock temperatures and operates in the range of -40 C to 260 C.

Kerosine

A low sulphur hydrocracked fuel used in a variety of applications including as a fuel, as a solvent and as a lubricant. Distinguished by its blue colour.

Handcleaner Xtra - With Pumice

A specially formulated lanolised waterless super hand cleaner with pumice for xtra cleaning power. Features MAF approval.

Antifreeze / Coolant and Antifreeze XT

These Antifreeze/Coolant products meet the needs of both passenger and commercial vehicles operating under most conditions. The ethylene glycol based low silicate formula provides extra protection from boilovers to 265°F and freezing down to -34°F, as well as rust and corrosion. Offers excellent protection for all metals, including aluminium and will not damage rubber parts. Meets ASTM D4985 and D3306.

Greases

Multipurpose EP 2 Grease

This is a high quality multi-purpose lithium grease fortified with extreme pressure agents, and is designed for use in chassis lubrication, universal joints, truck fifth wheels and low load wheel bearings. Suitable for use where operating temperatures are between -20 and 135 degrees C. Distinguished by its brown colouring.

Multiplex EP 2 Grease

A premium quality, lithium complex extreme pressure grease that provides outstanding performance under the most severe operating conditions. Suitable for use where operating temperatures are between -20 and 210 degrees C and for use in most wheel bearing applications and machinery under heavy loads. Also has a high water resistance. Coloured blue/green for identification.

Moly Lithium EP 2 Grease

A multi-purpose lithium EP grease with molybdenum disulfide to provide extra protection against fretting and vibrational motion. Most common use in CV joints and the like, also recommended for a wide variety of powertrain applications. Suitable for use where operating temperatures are between 0 & 135 degrees C. Distinguished by its dark, almost black colouring.

Washes and Degreasers

Citrus Cleaner

This is a completely biodegradable hard surface cleaner containing a broad spectrum disinfectant that has been formulated to be an environmentally friendly cleaner. This is a concentrated product that provides rapid penetration and removal of soiling on any washable hard surface.

Super Solv

This is an effective cleaner for degreasing and removing heavy oils and greases, and is formulated for use in industry where heavy duty degreasing is required.

Transwash

This is a specialised blended wash formulated using surfactants suitable for use in removing a wide variety of soils from trucks, buses, cars as well as building exteriors, and is suitable for use through water blasters.